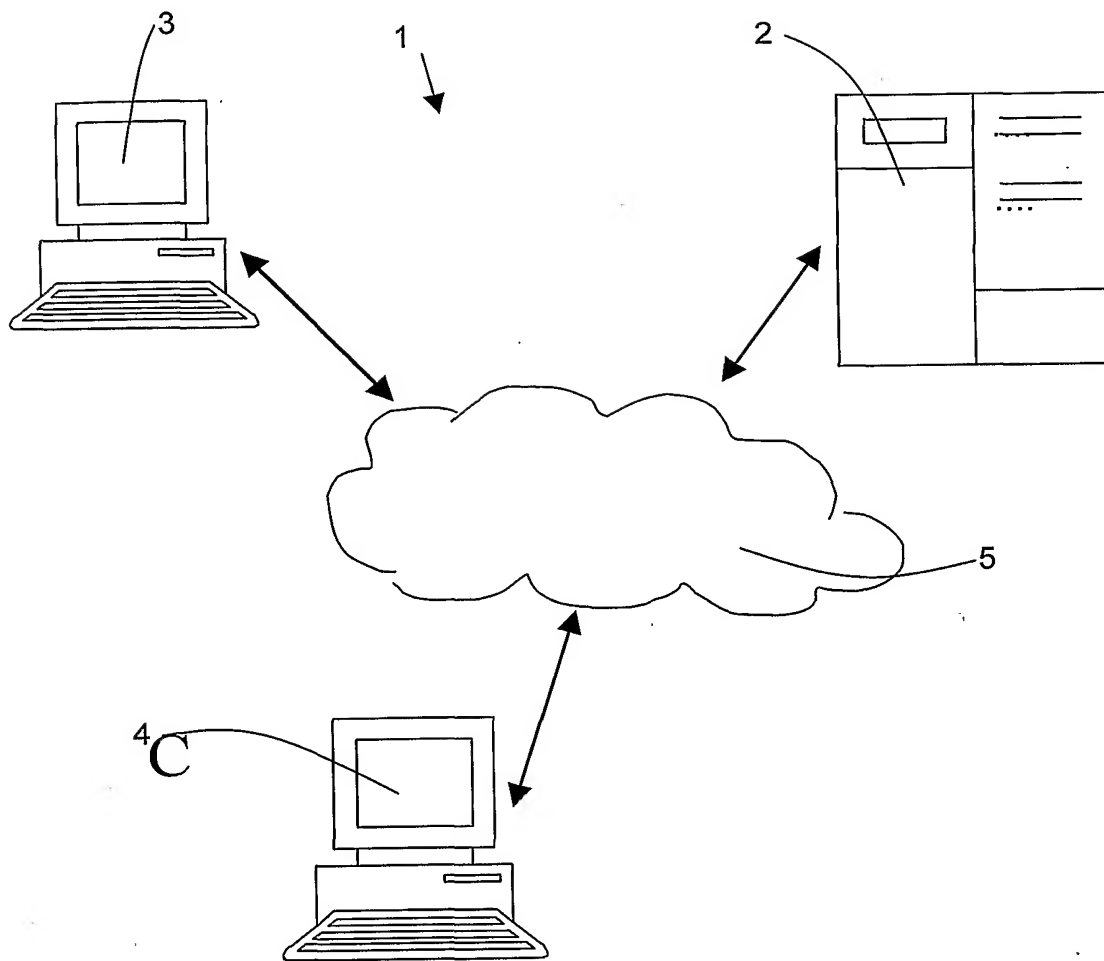
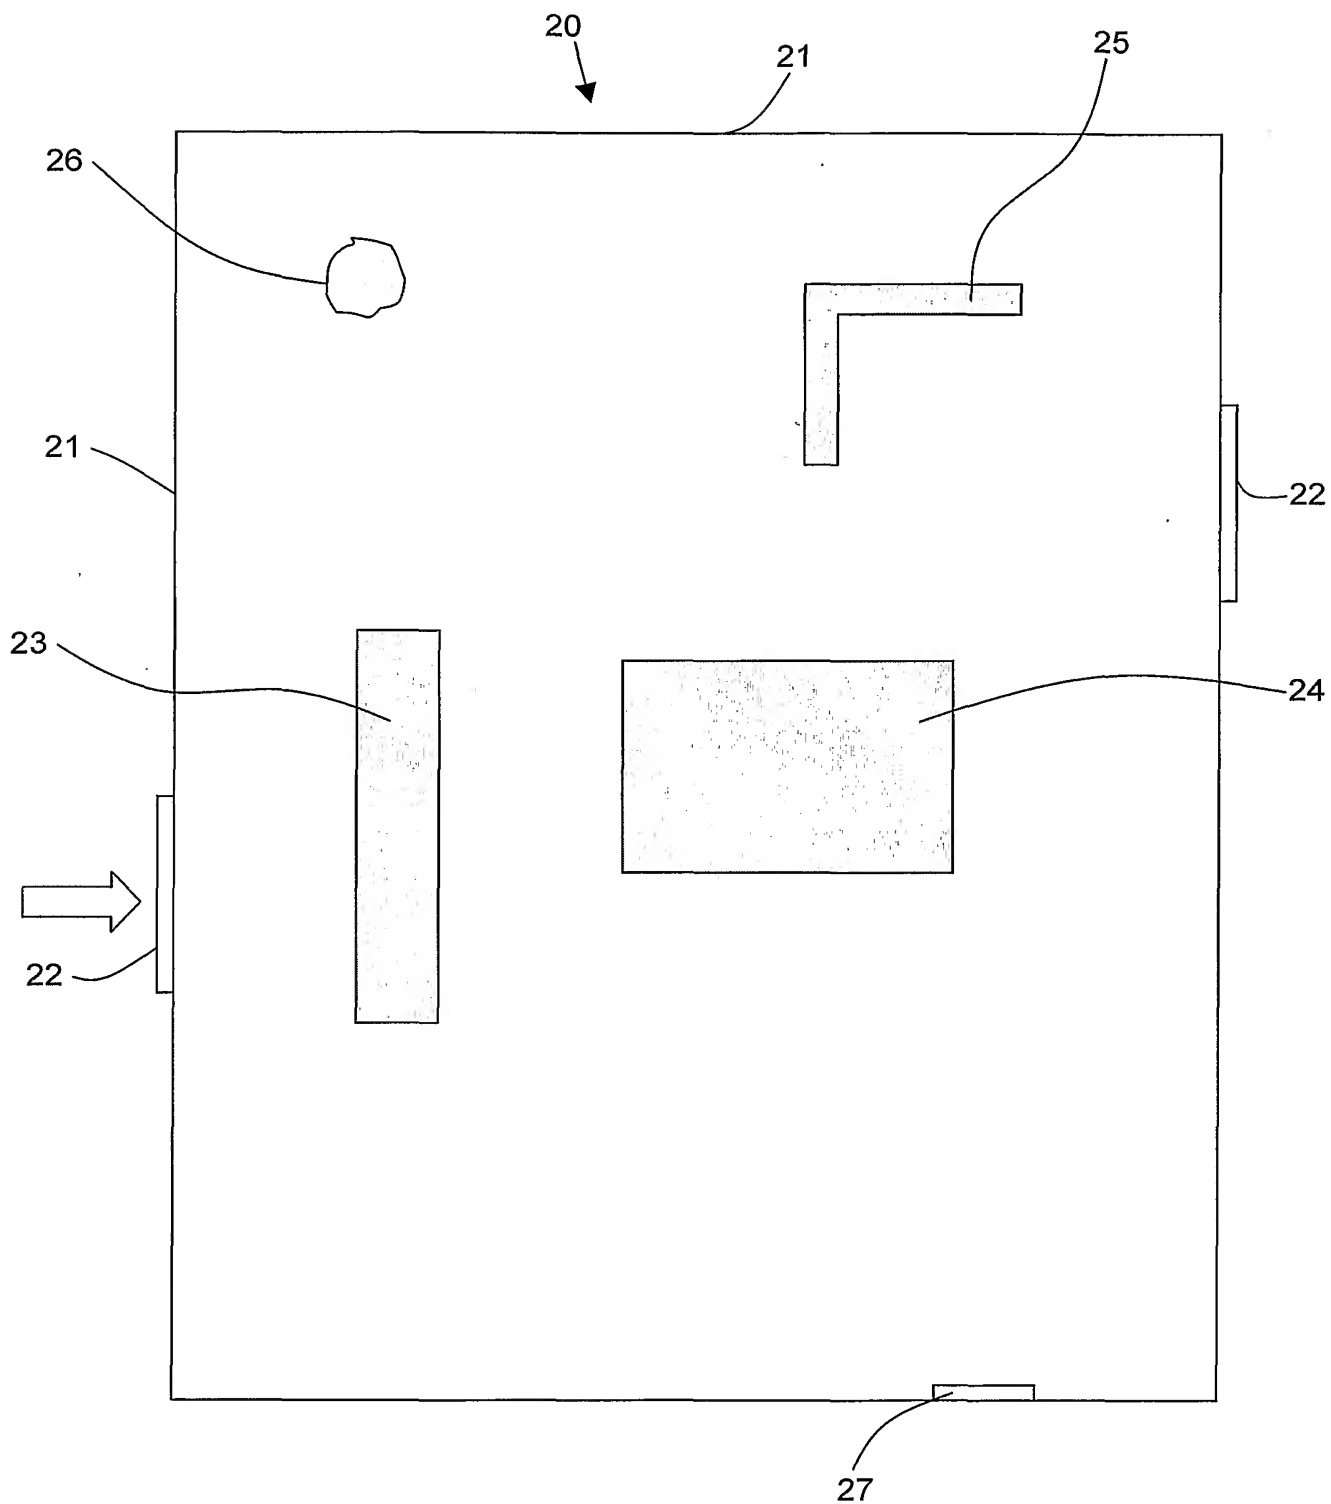


1/17

Figure 1

2/17

Figure 2

3/17



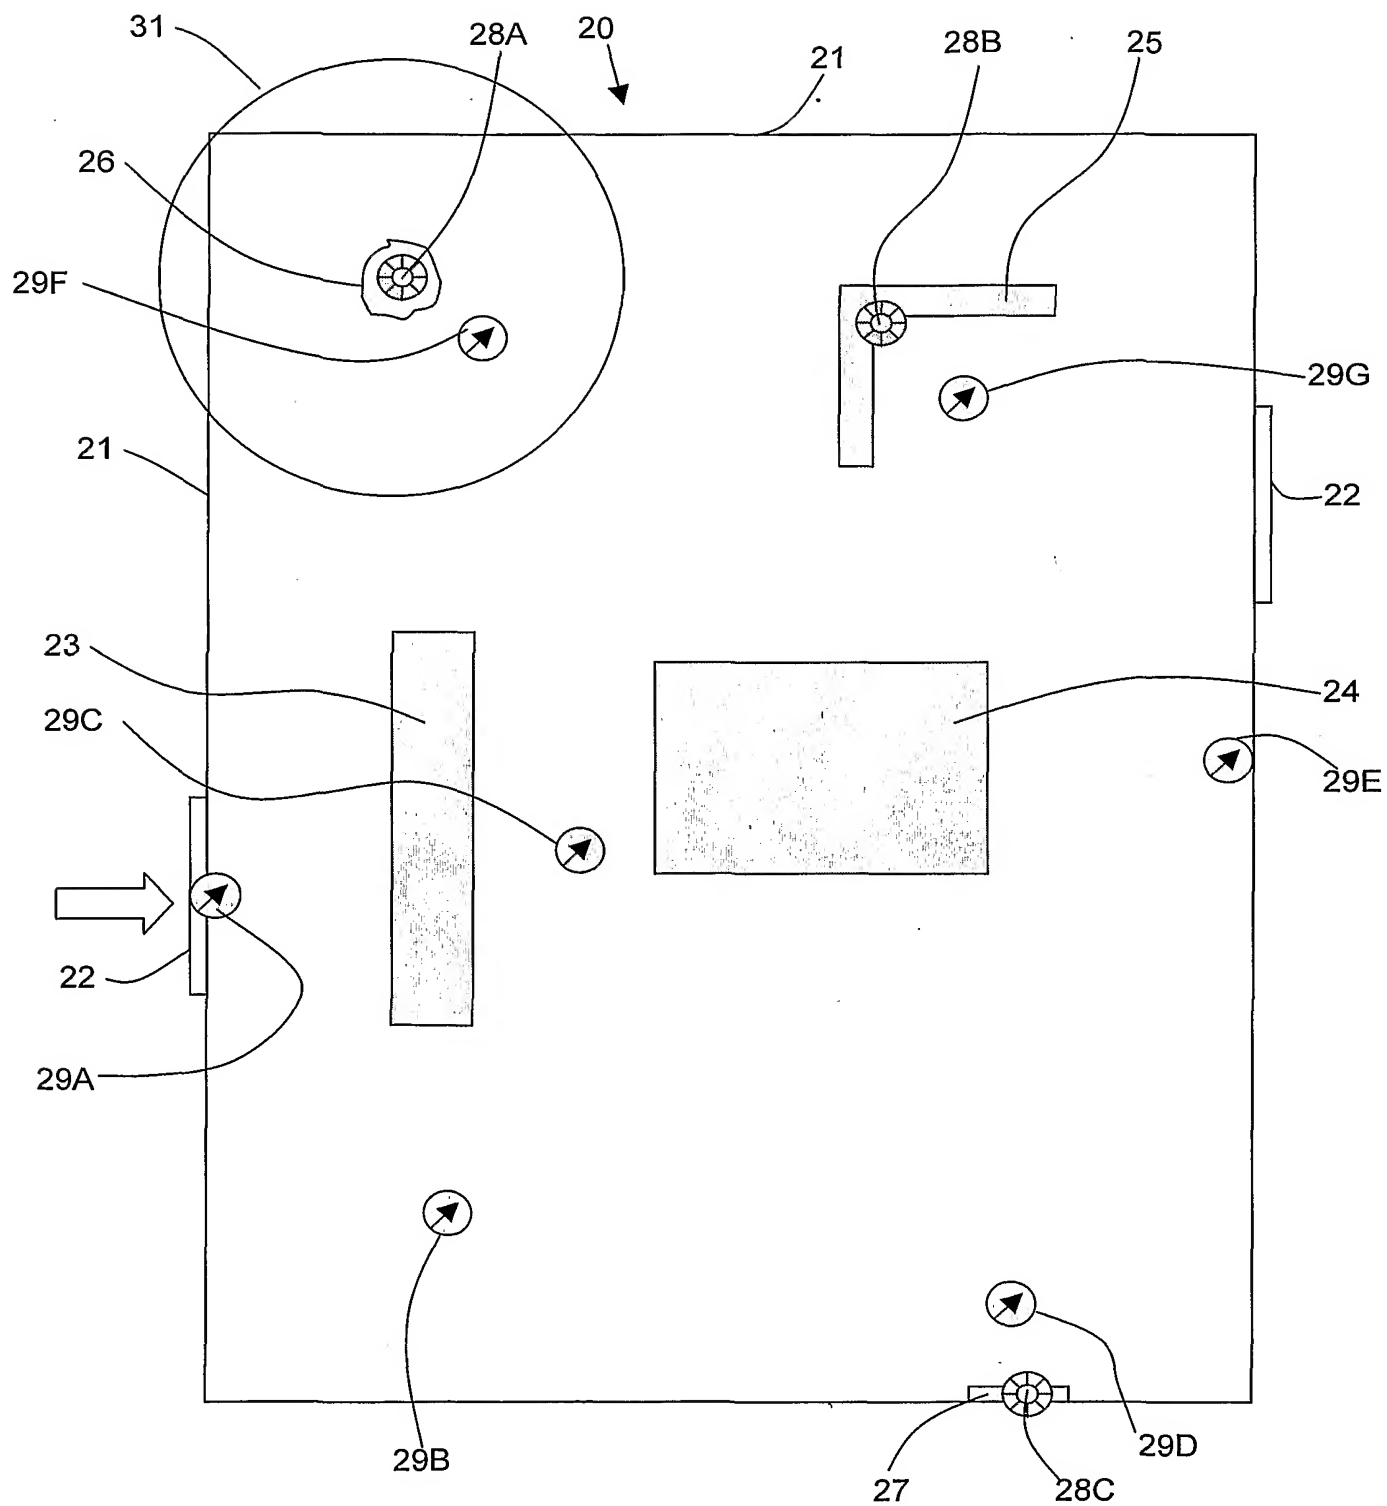
Figure 3

Figure 4

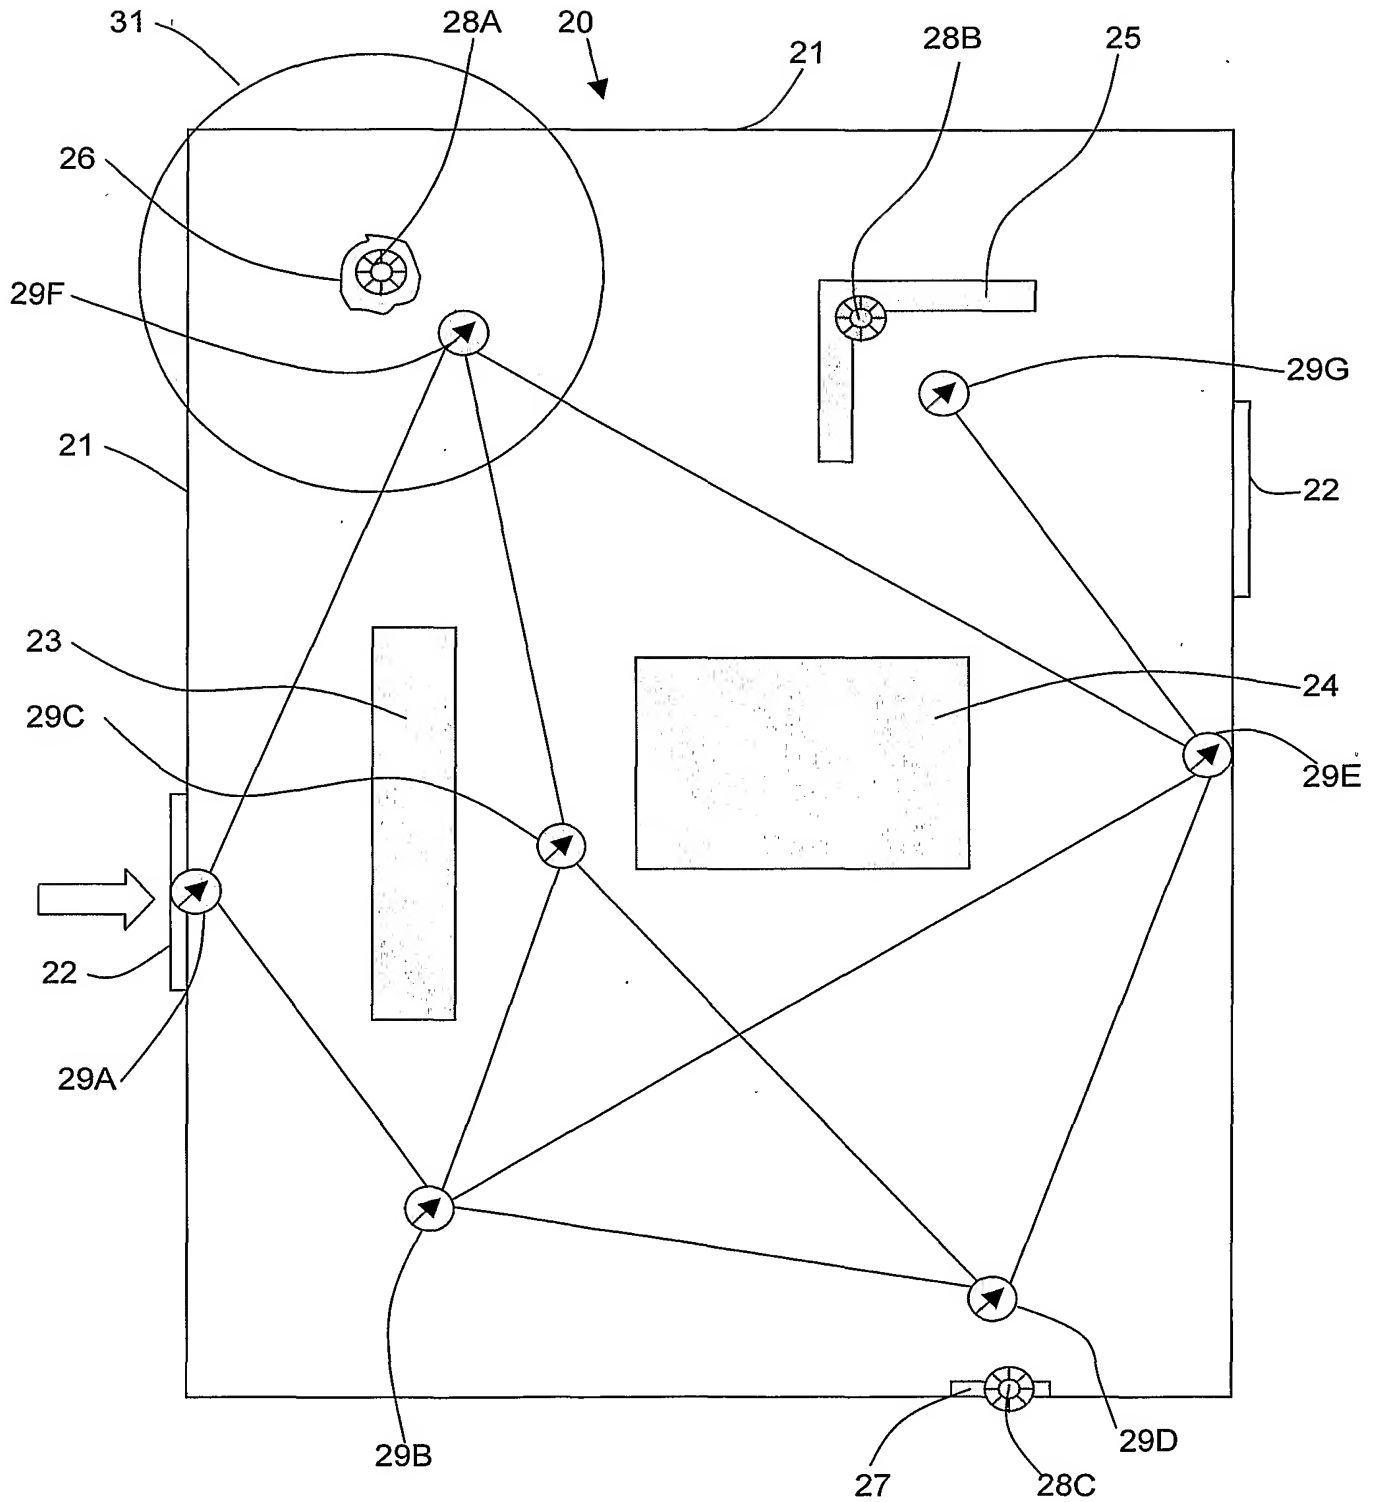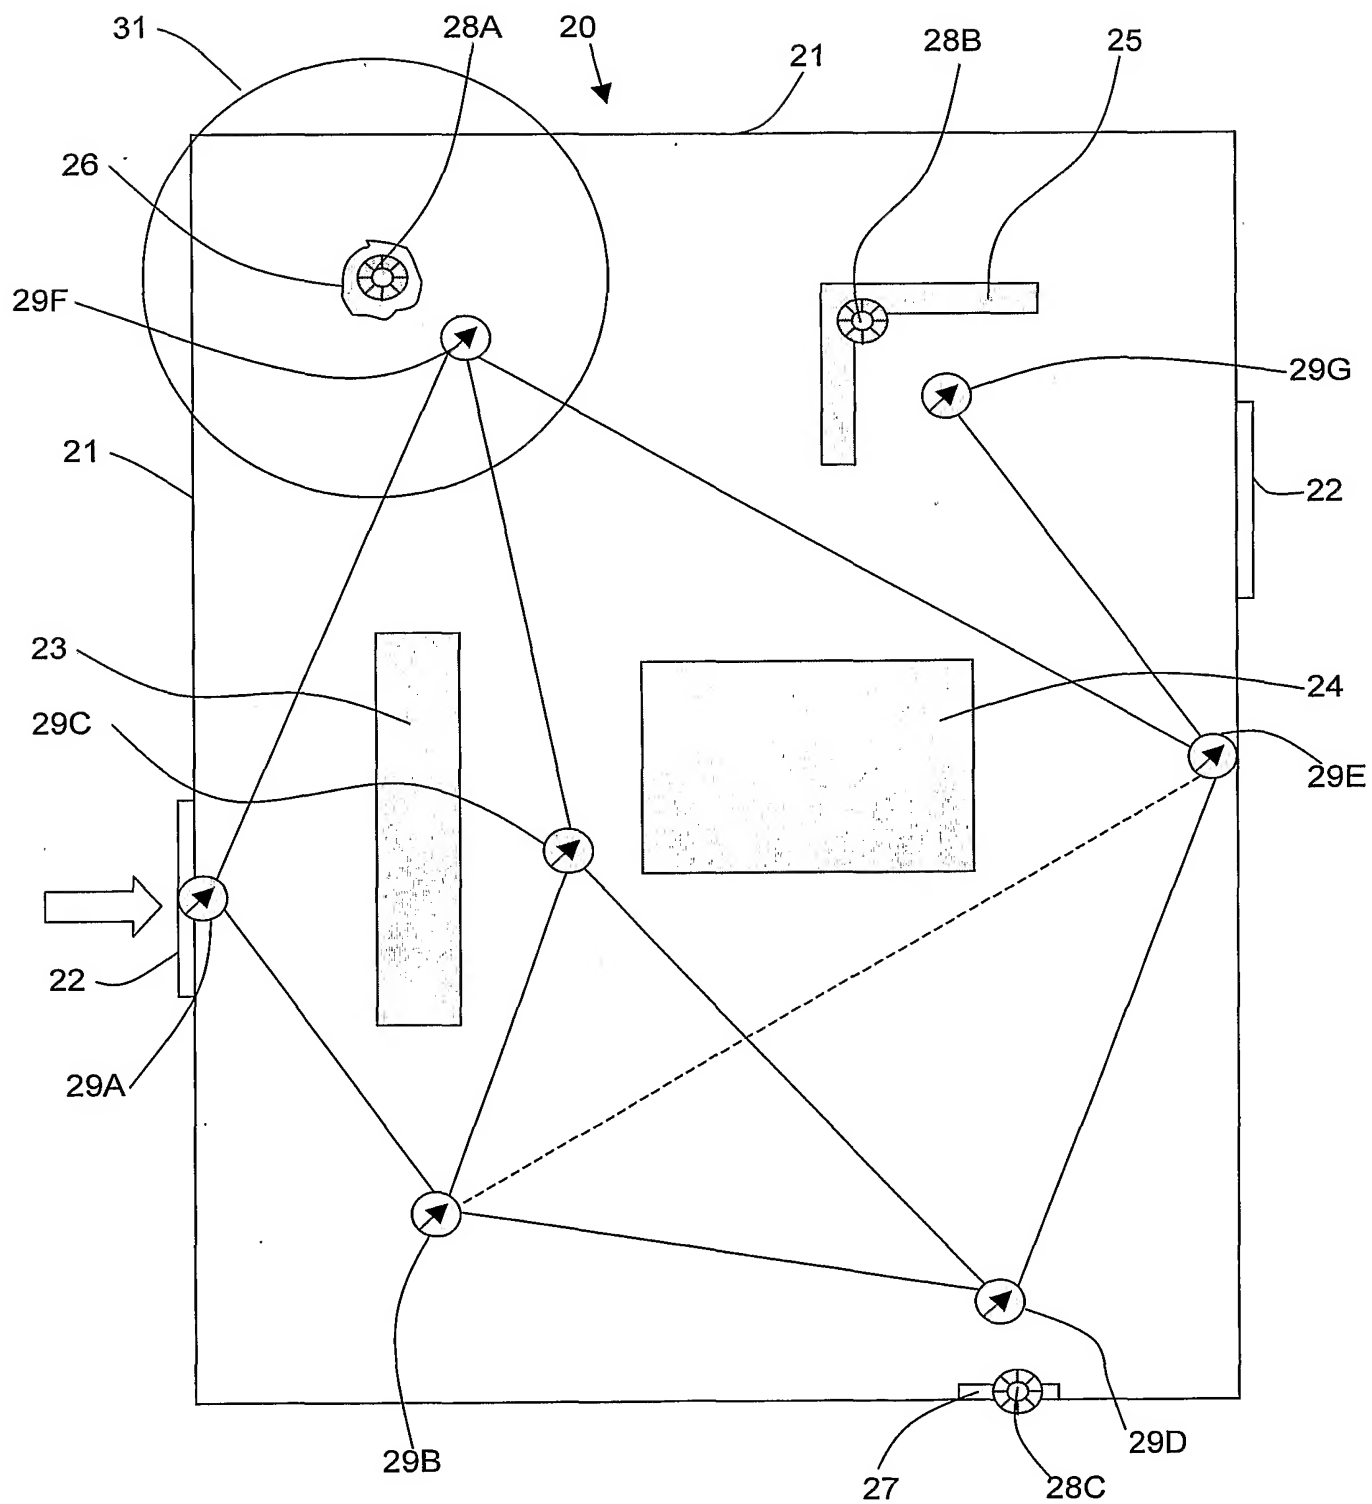


5/17

Figure 5


6/17

Figure 6

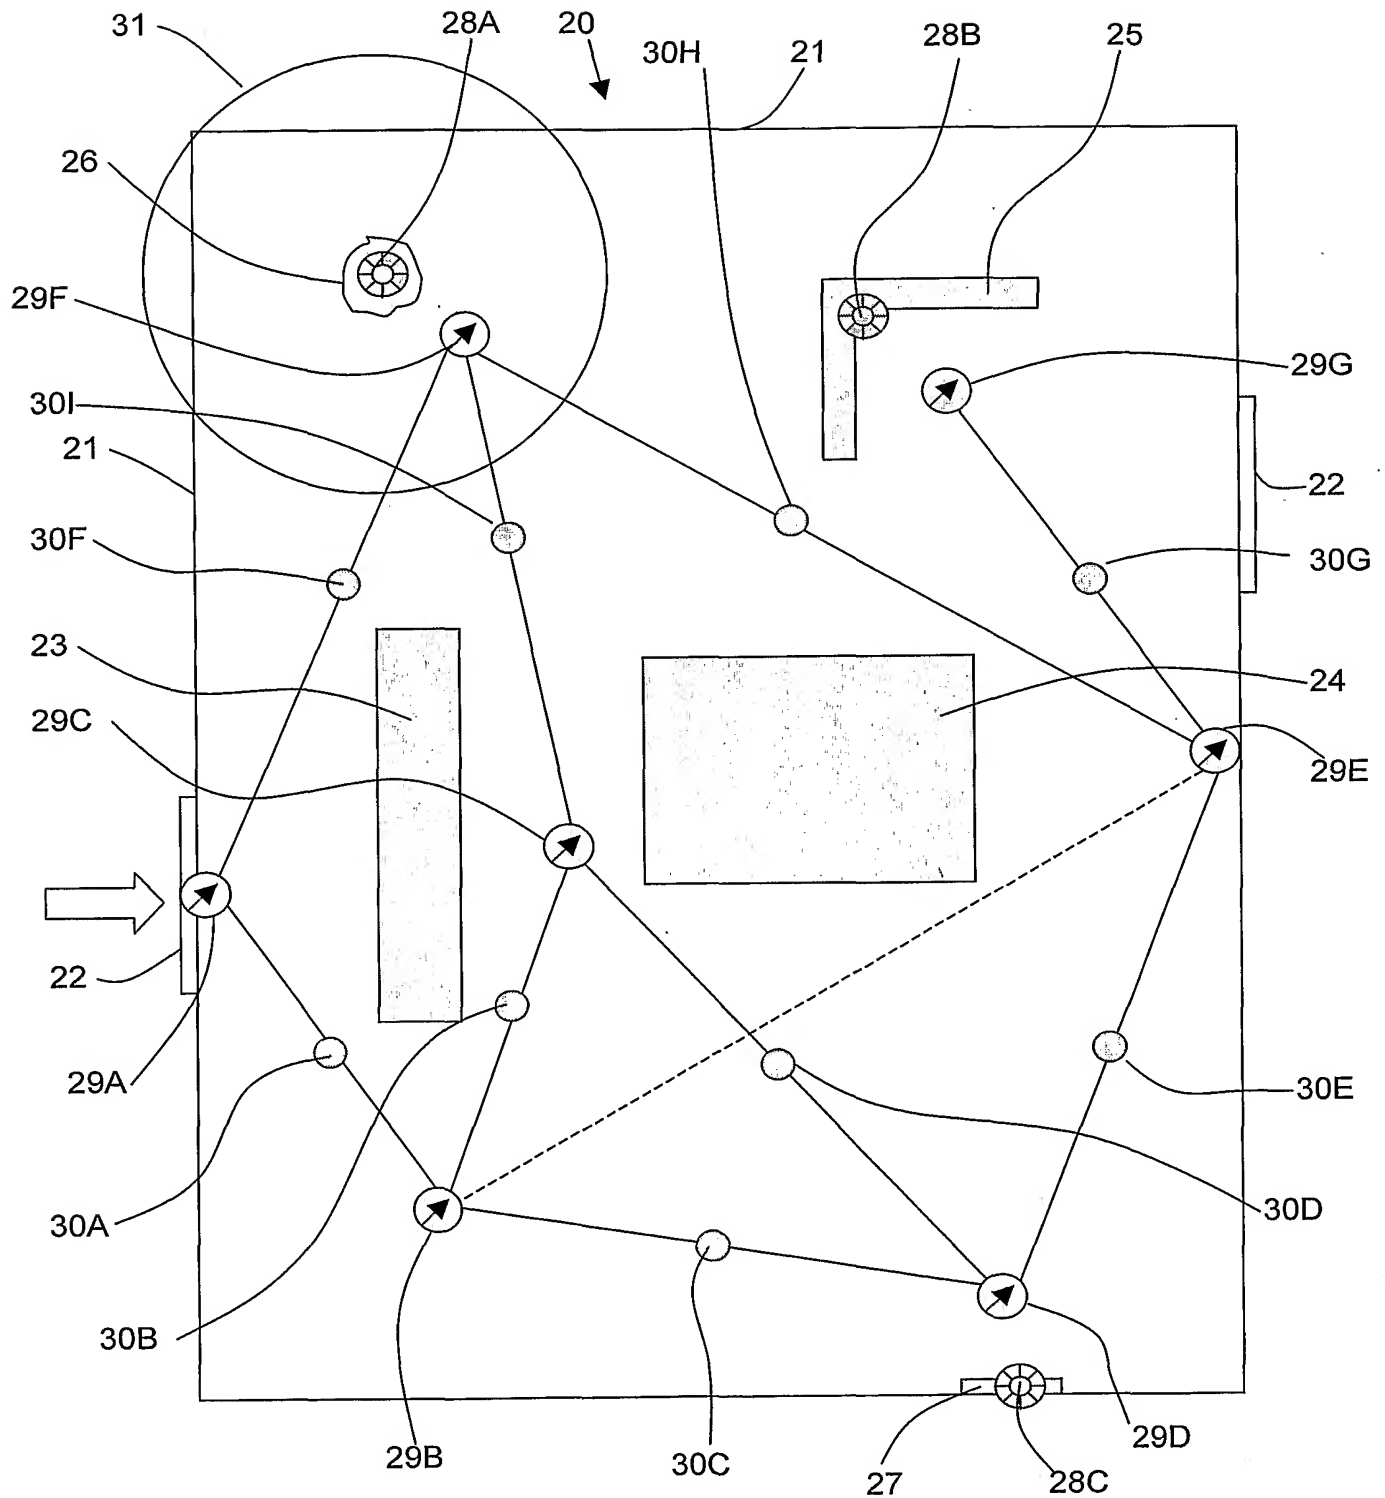


7117

Figure 7

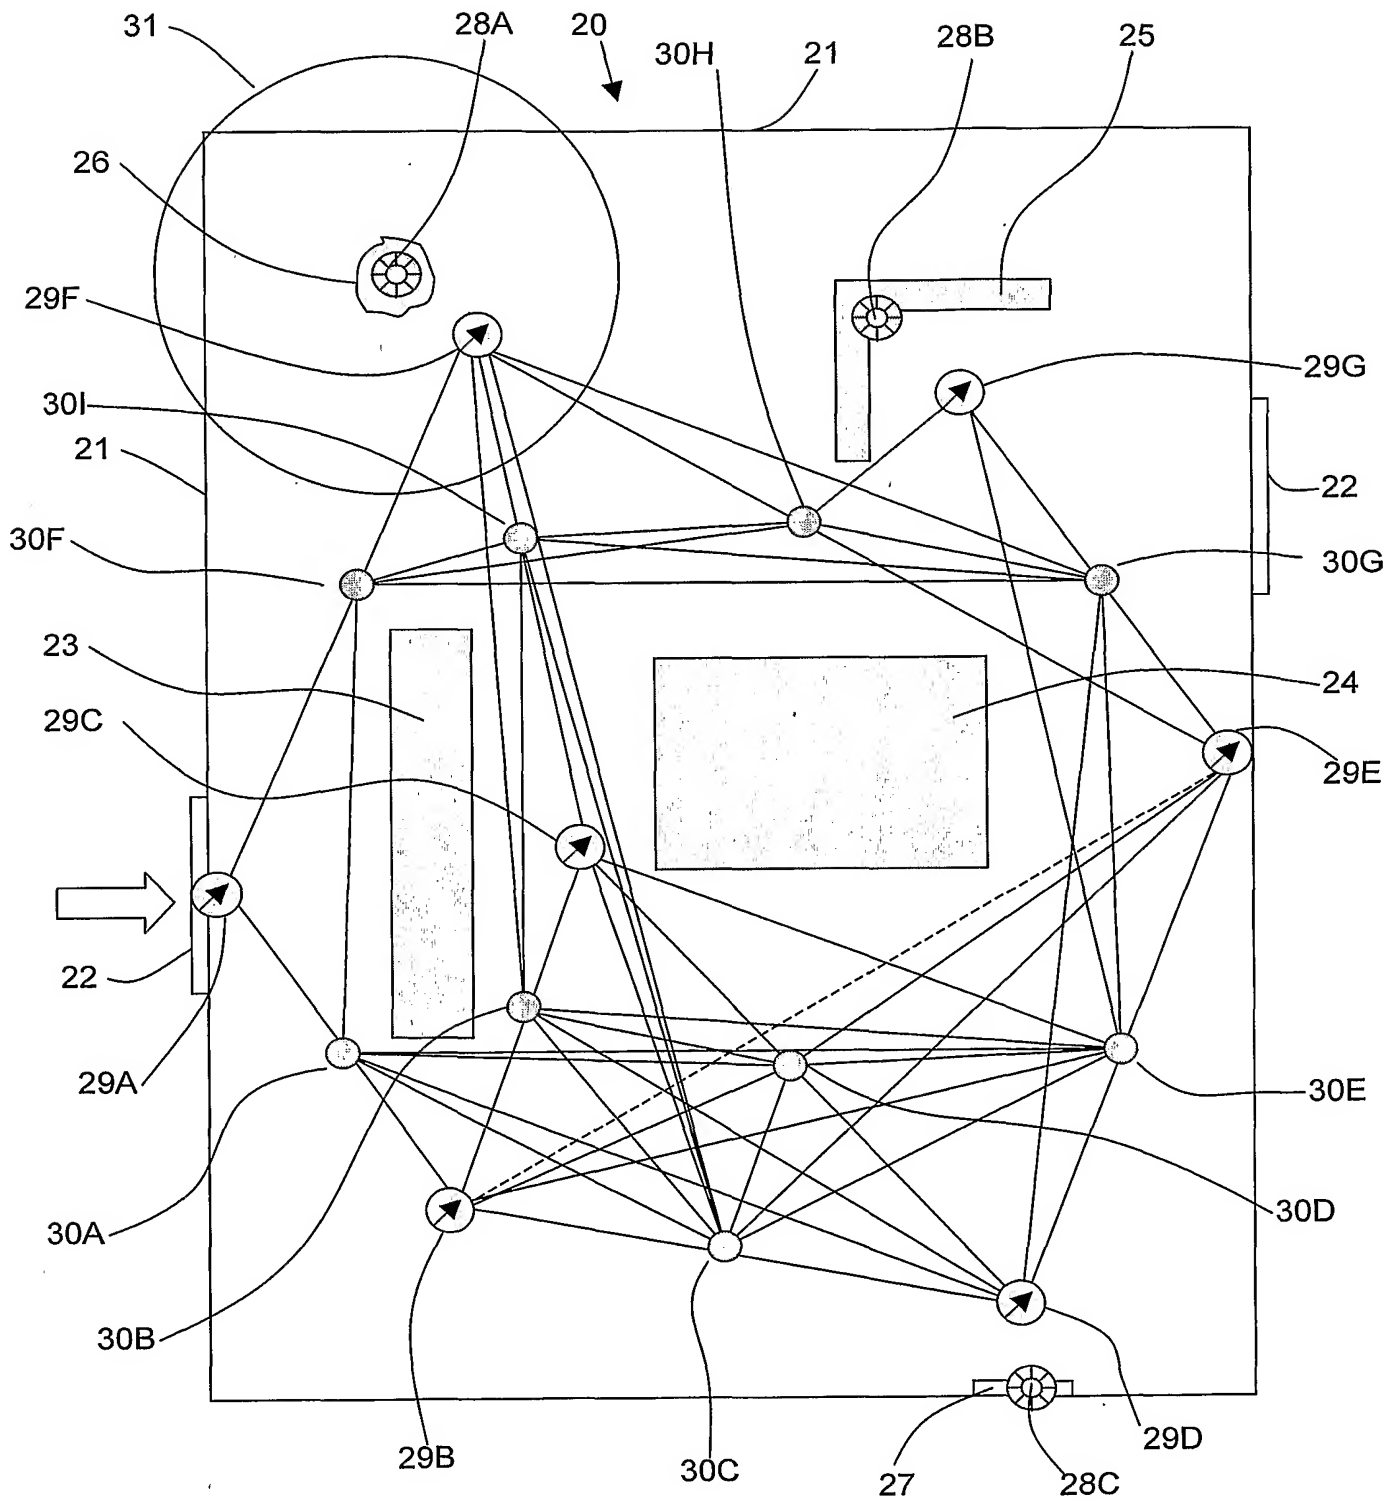


8/17

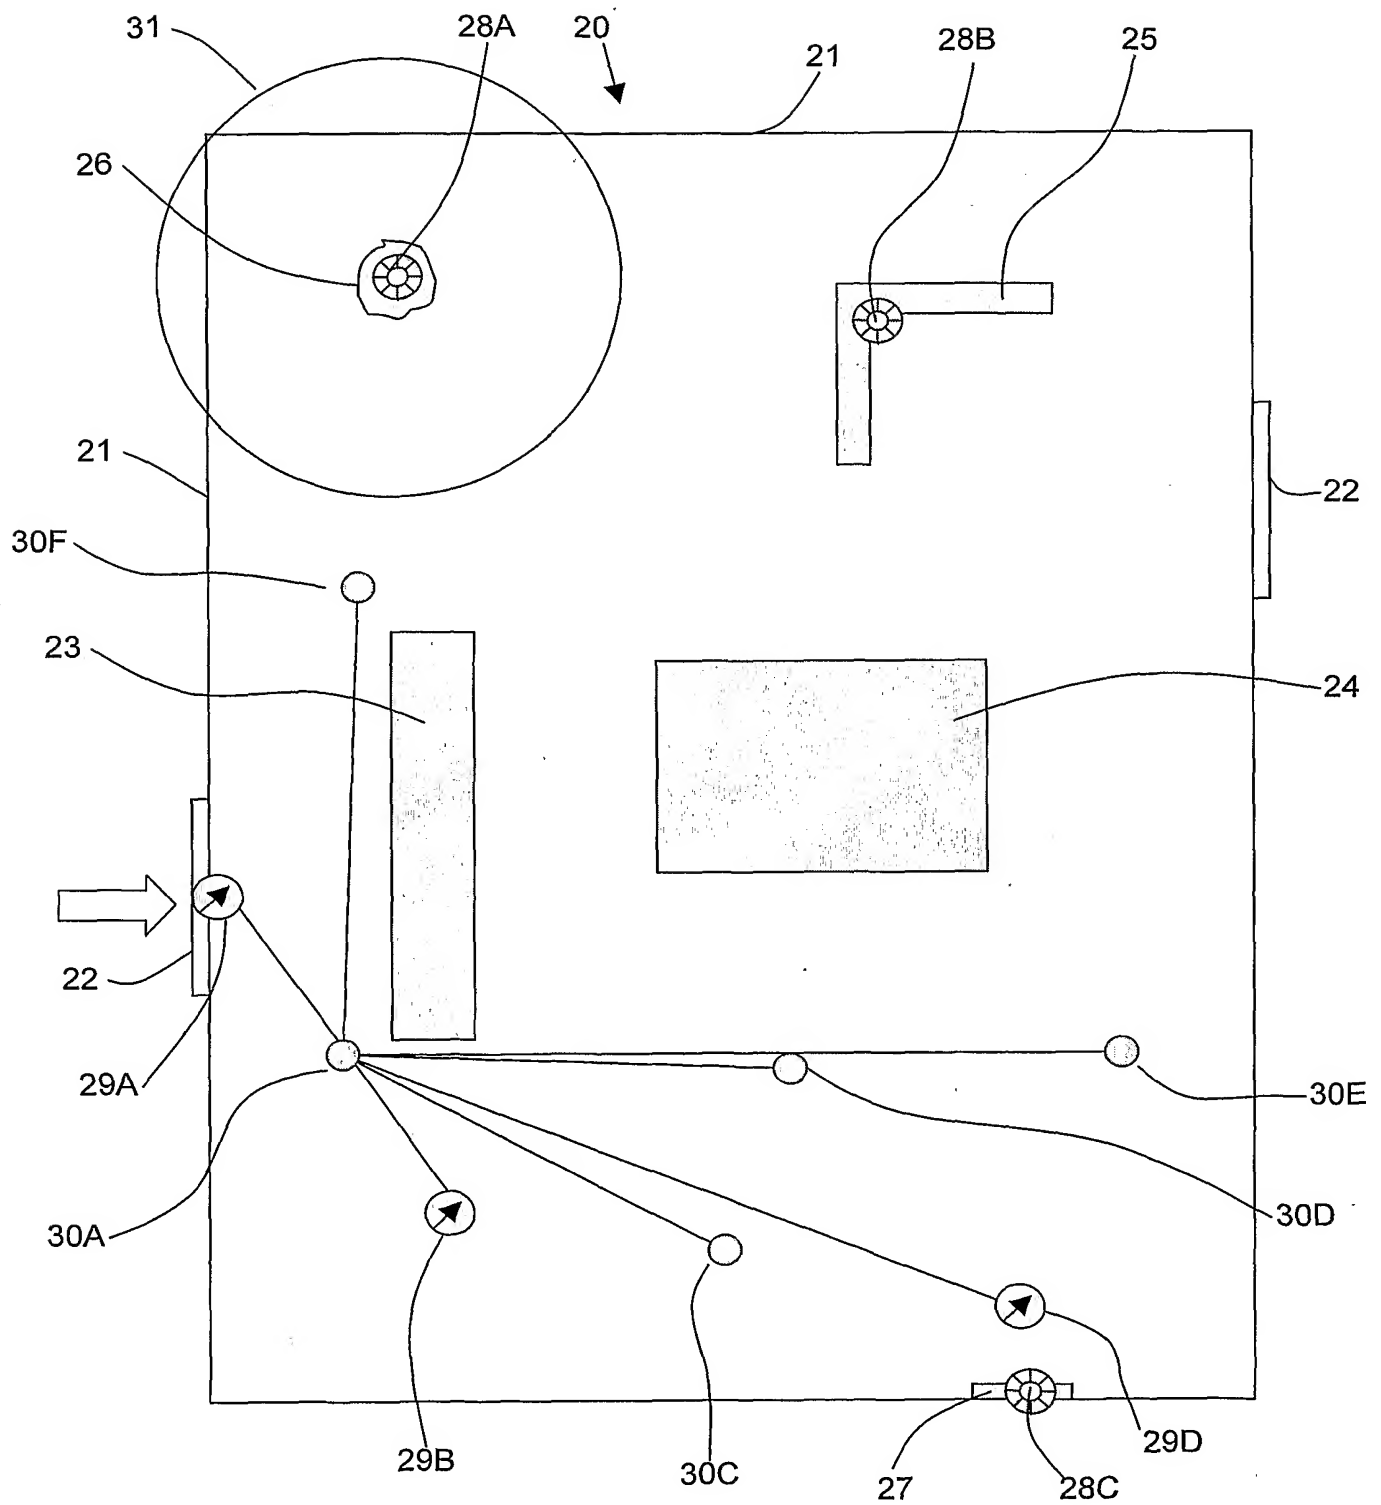
Figure 8

9/17

Figure 9

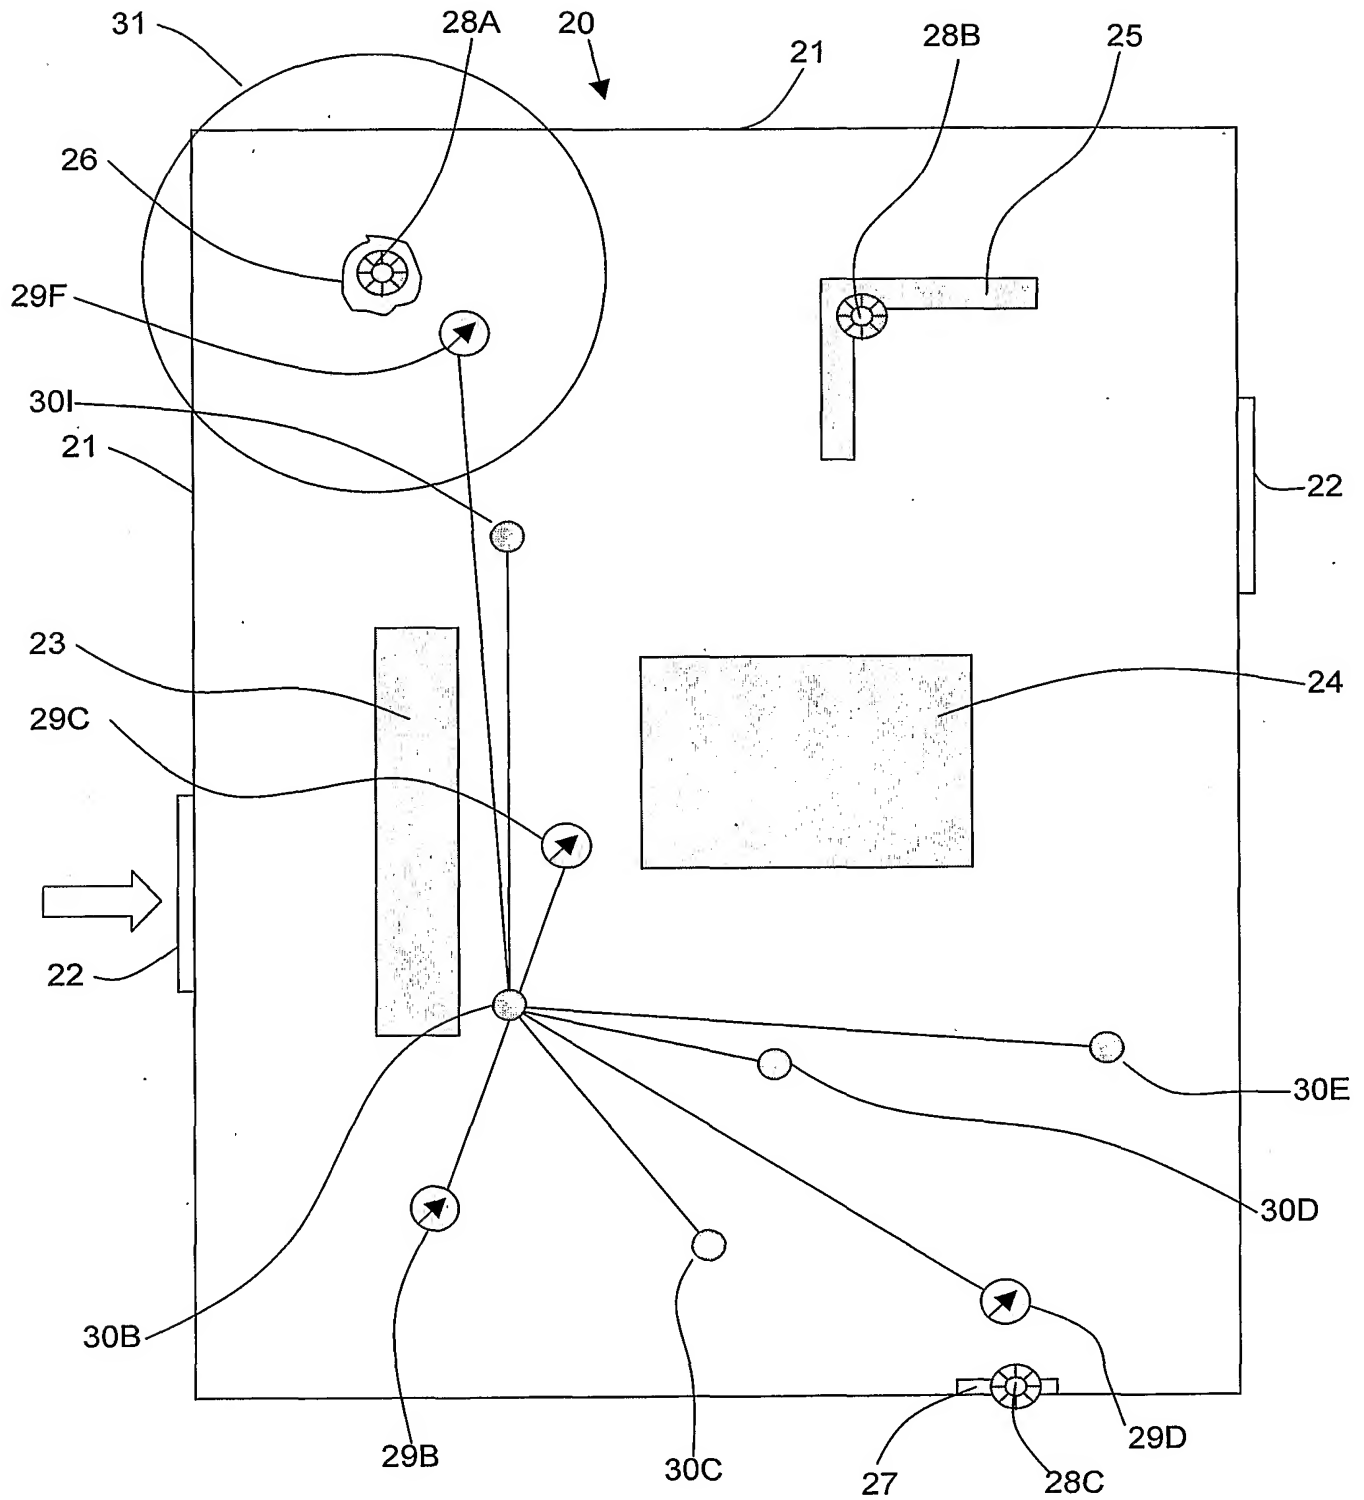

10/17

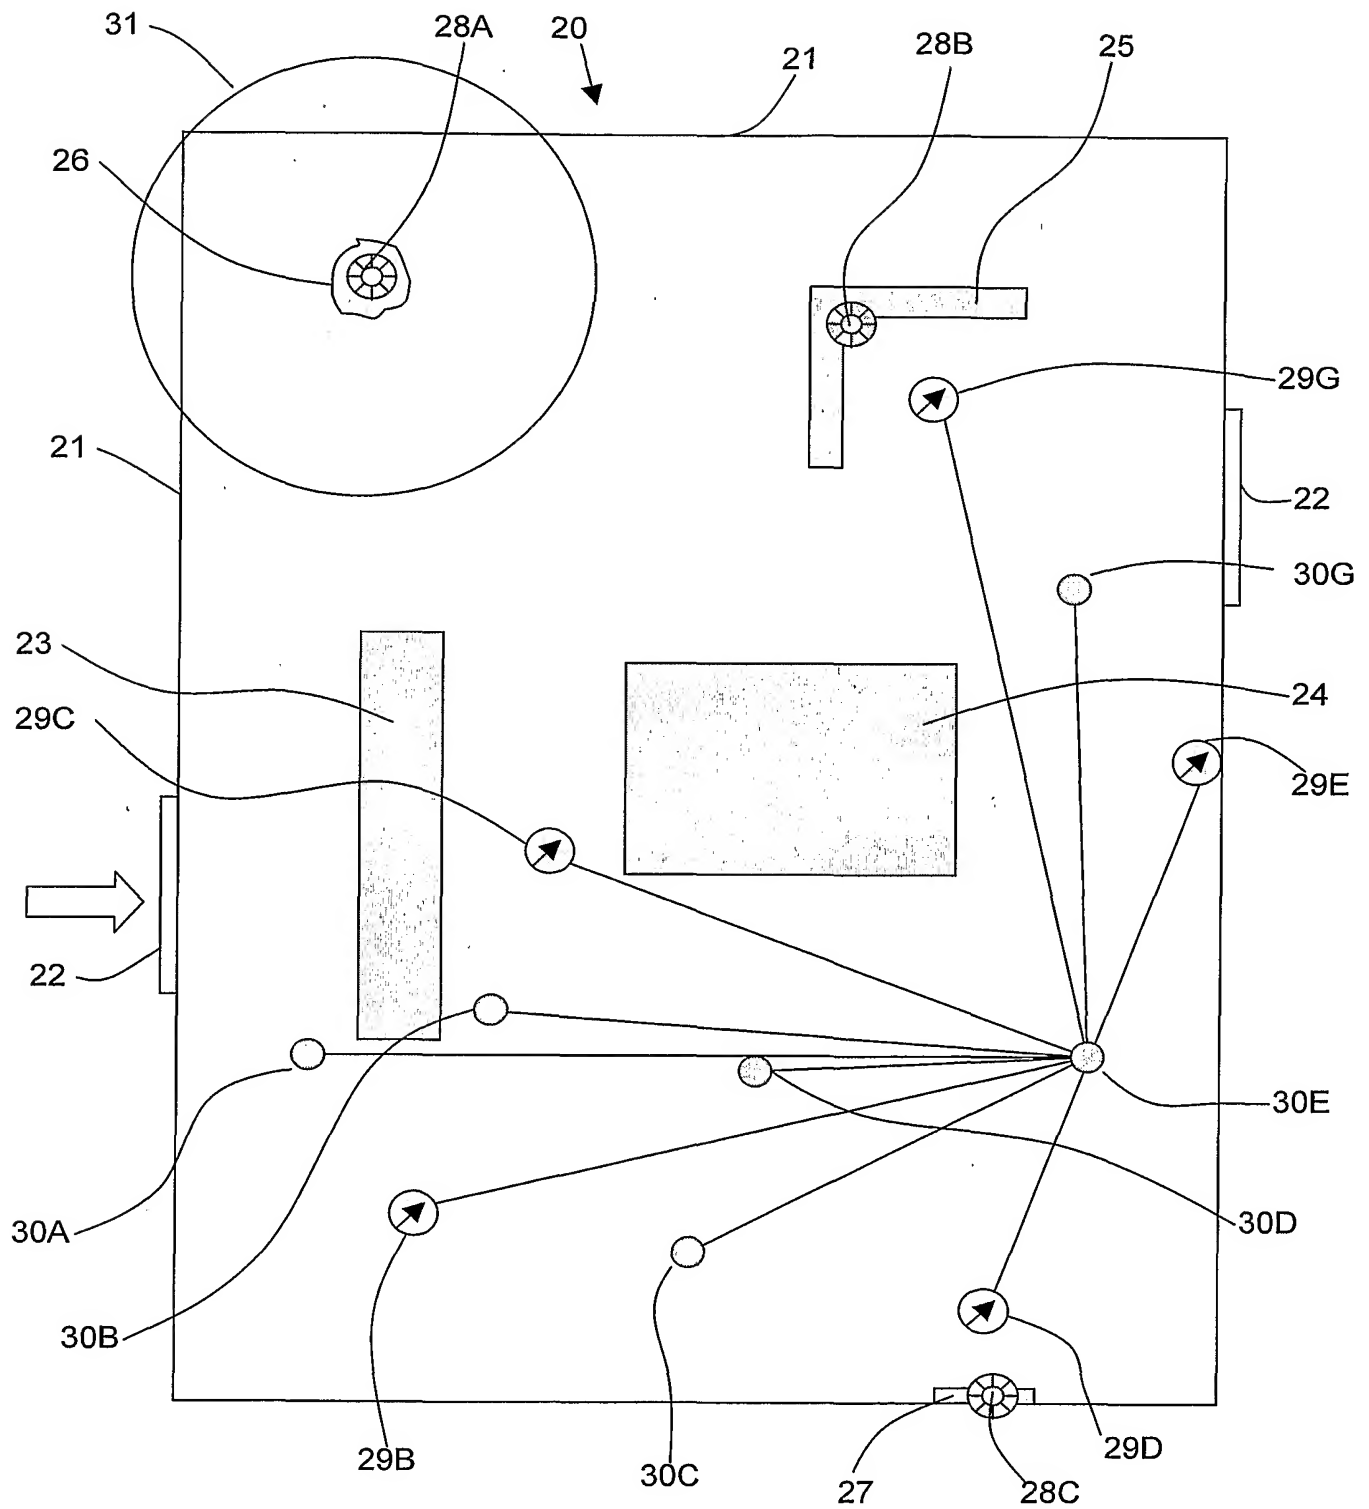Figure 10

11/17


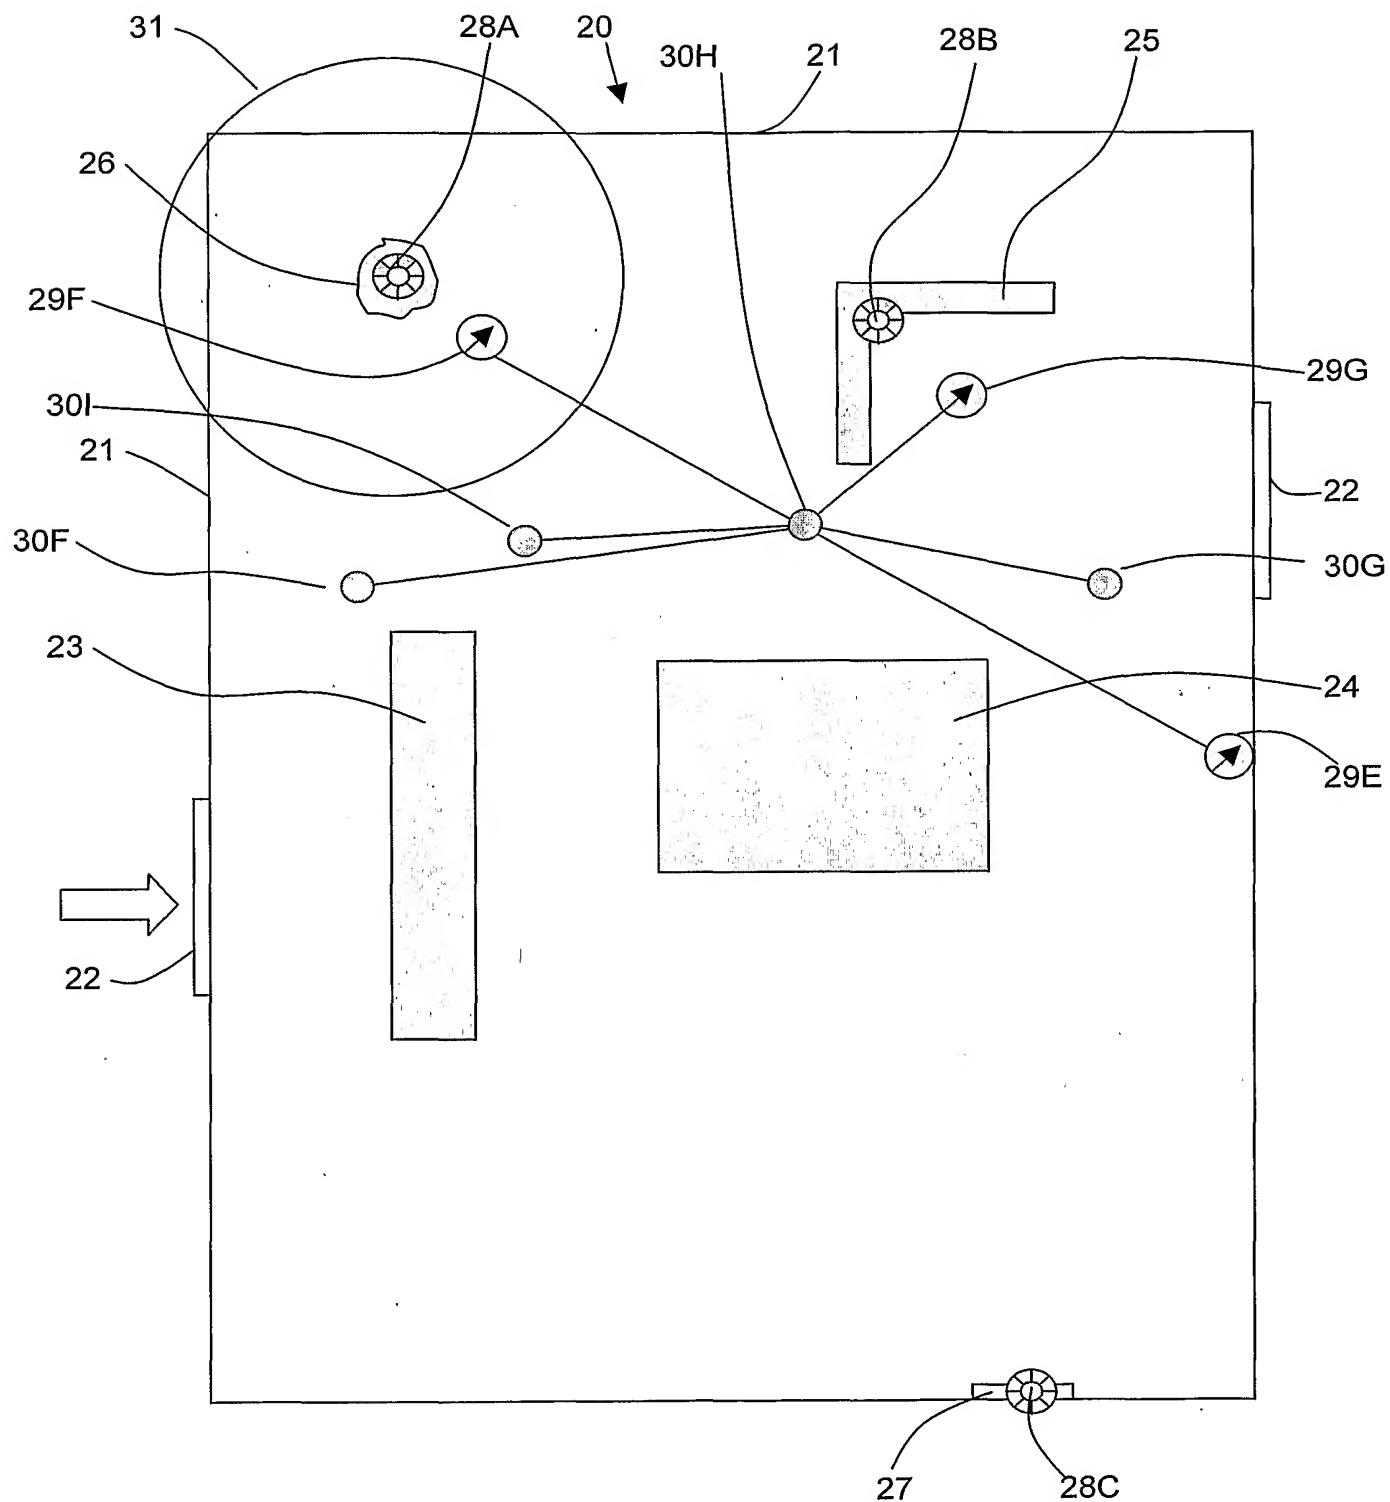
Figure 11

Figure 12

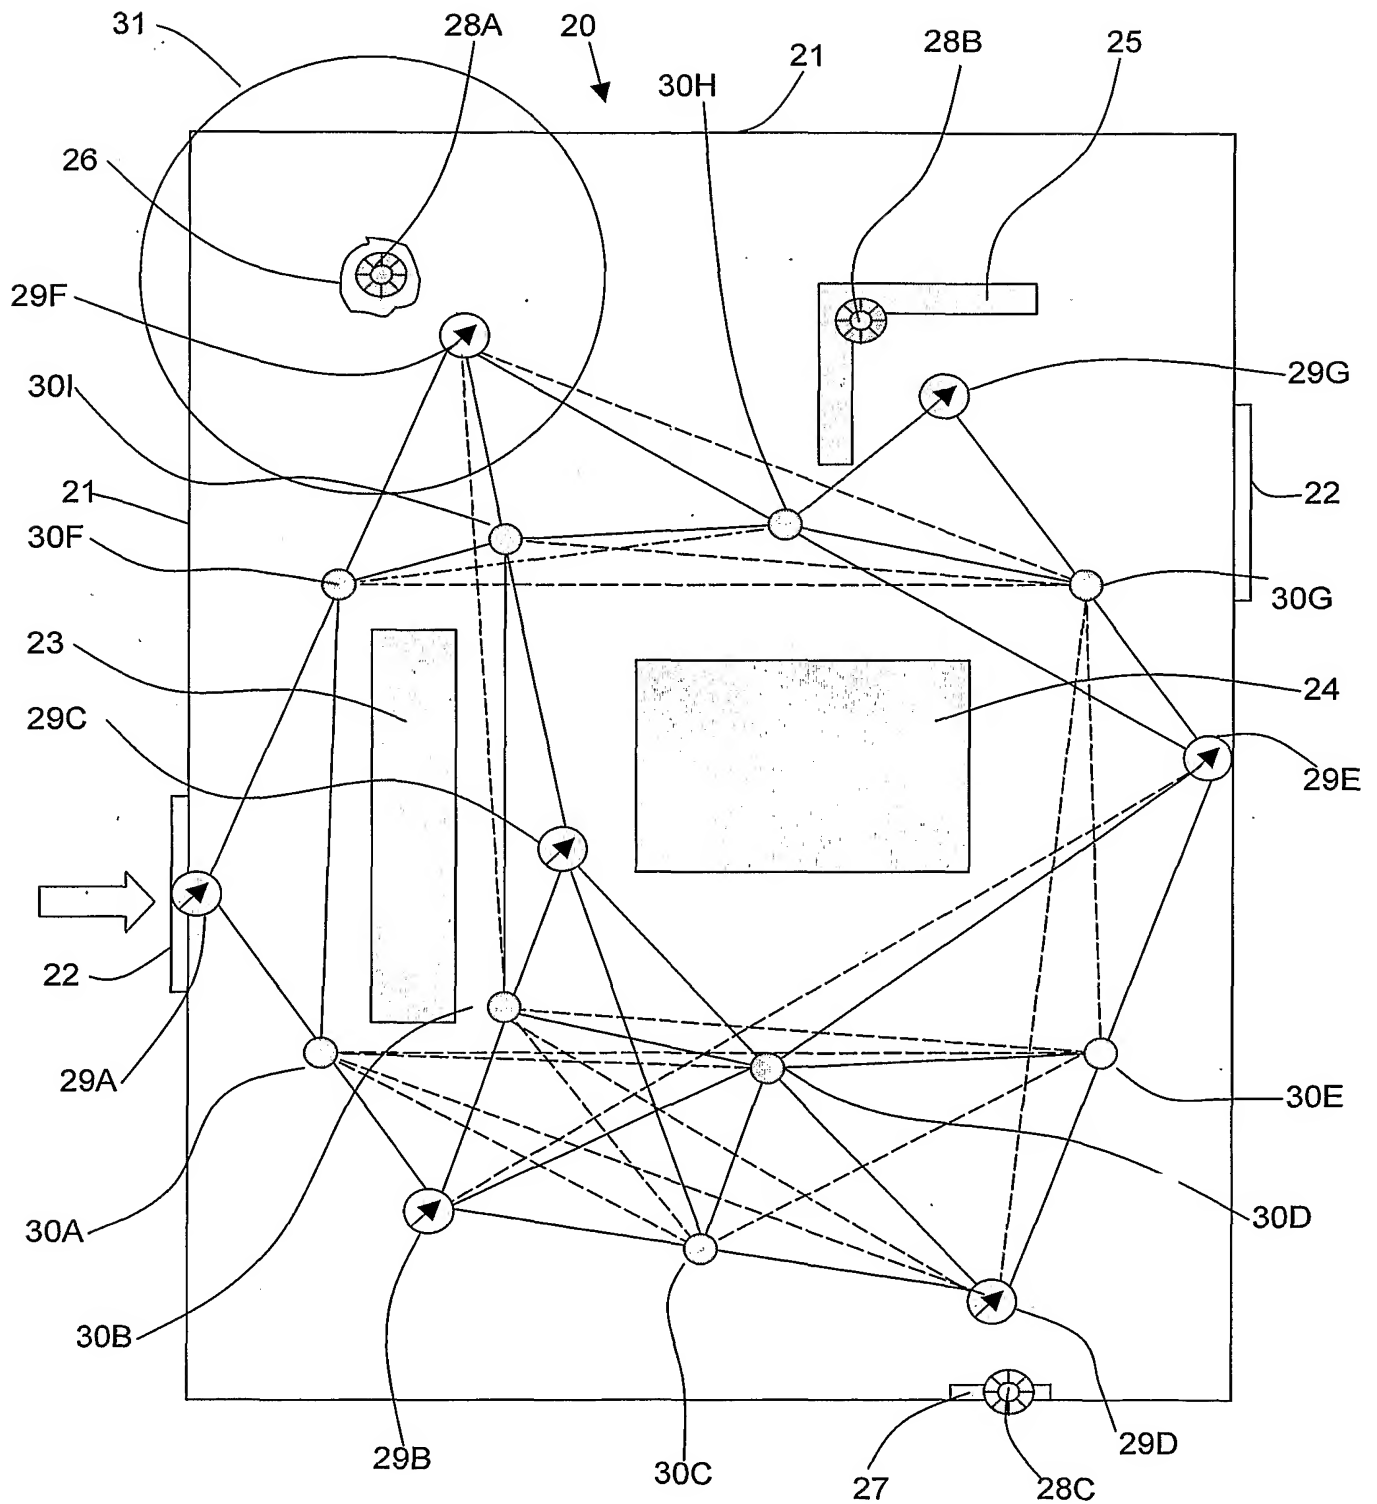

13/17

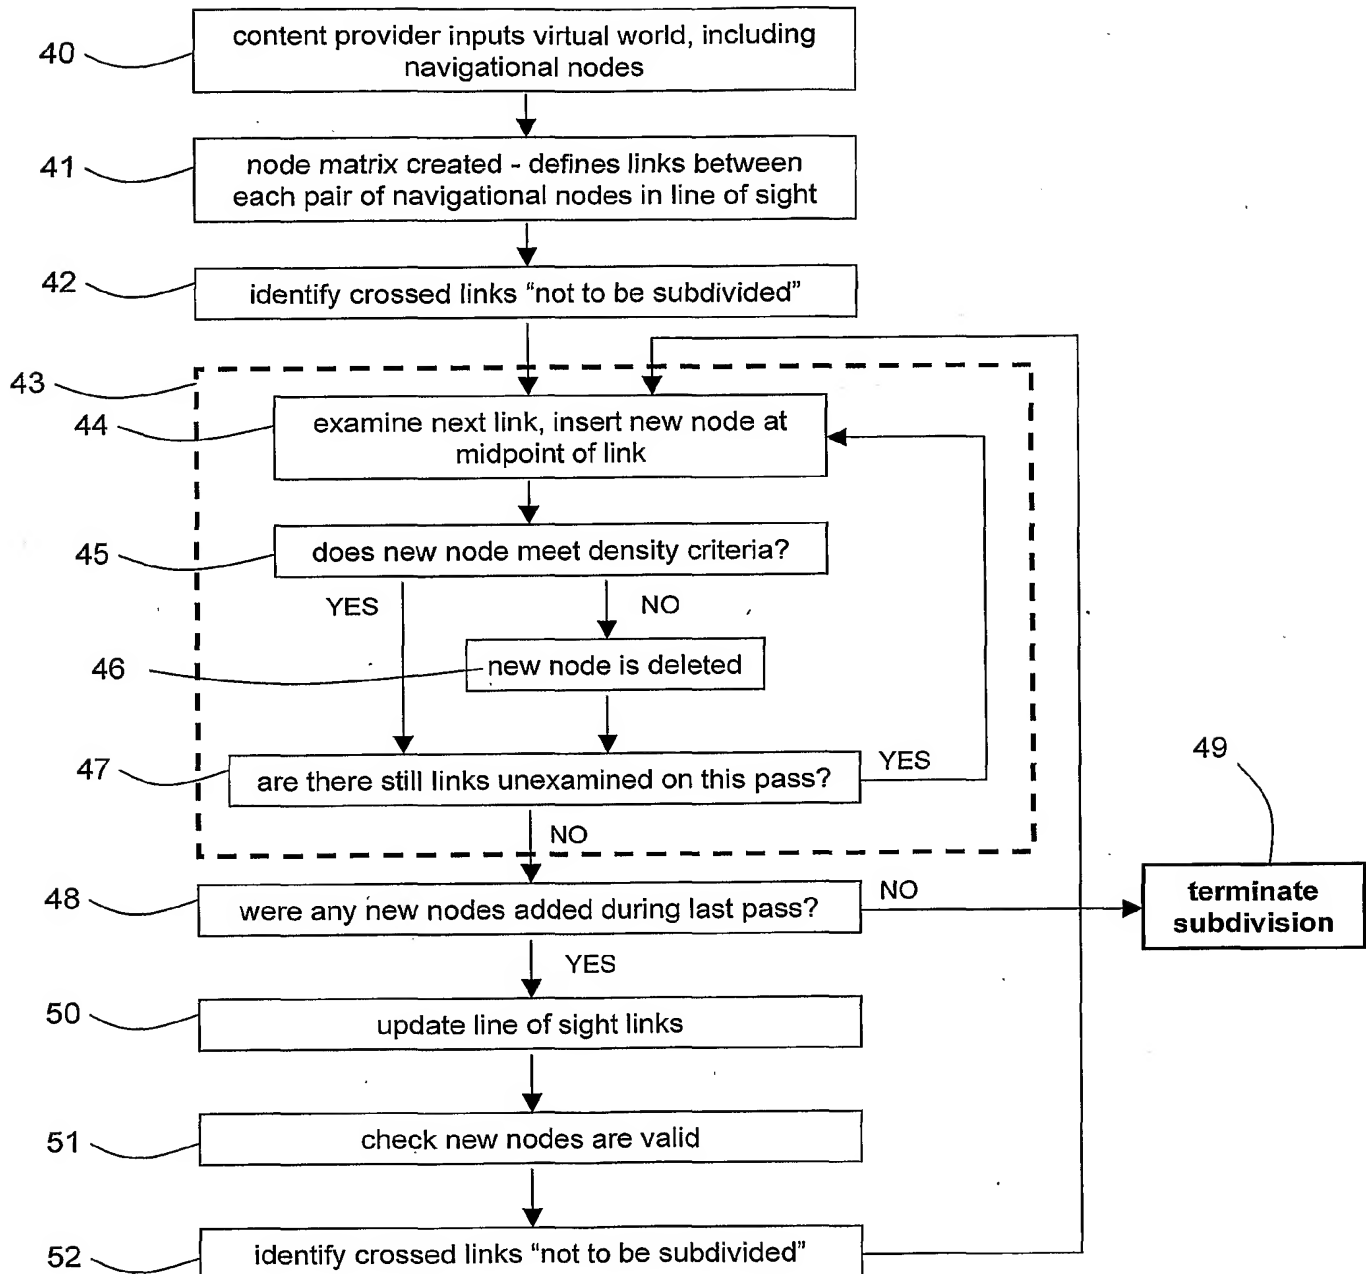
Figure 13

FIGURE 14A

OPTIMUM NODE
CONNECTION

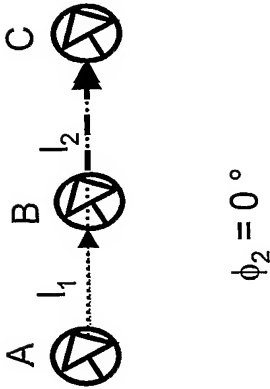


FIGURE 14B

AVAILABLE NODE
CONNECTION


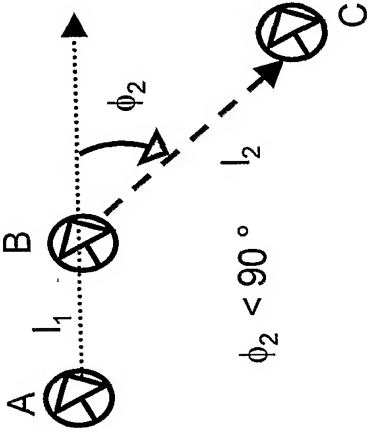


FIGURE 14C

INEFFICIENT NODE
CONNECTION

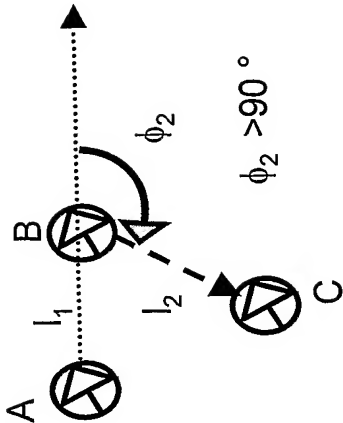


15/17

FIGURE 15A



FIGURE 15B

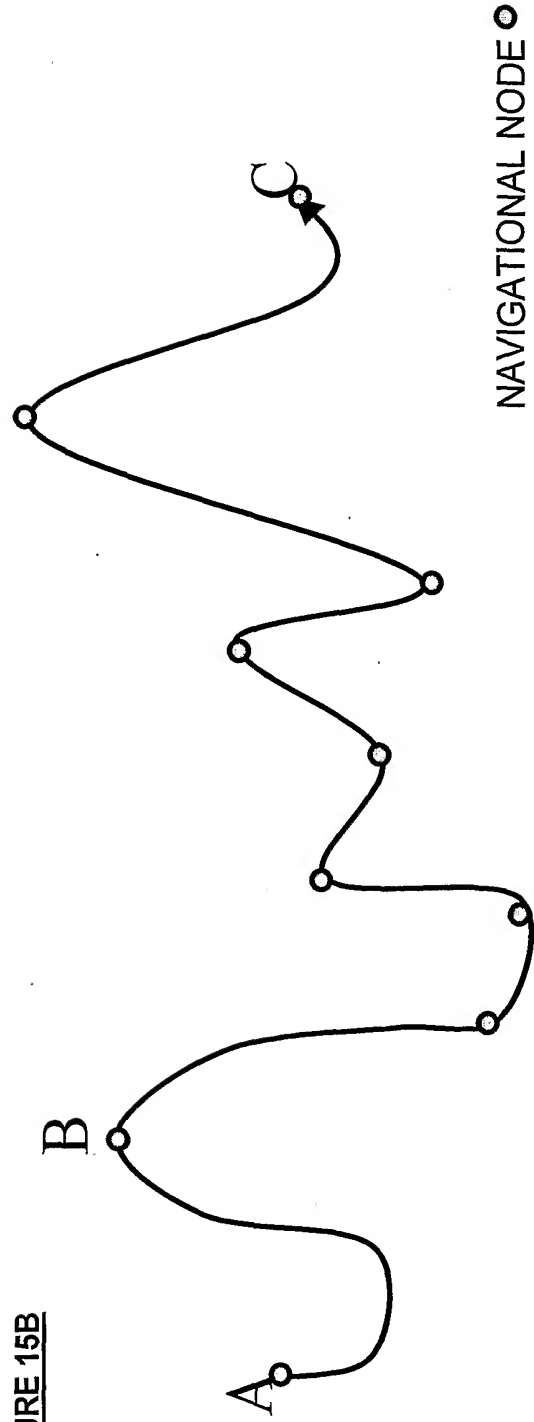


16/17

FIGURE 16A



NAVIGATIONAL NODE WITH VALID
LOS CONSTRAINED TO A RANGE 0°
TO θ°

FIGURE 16B

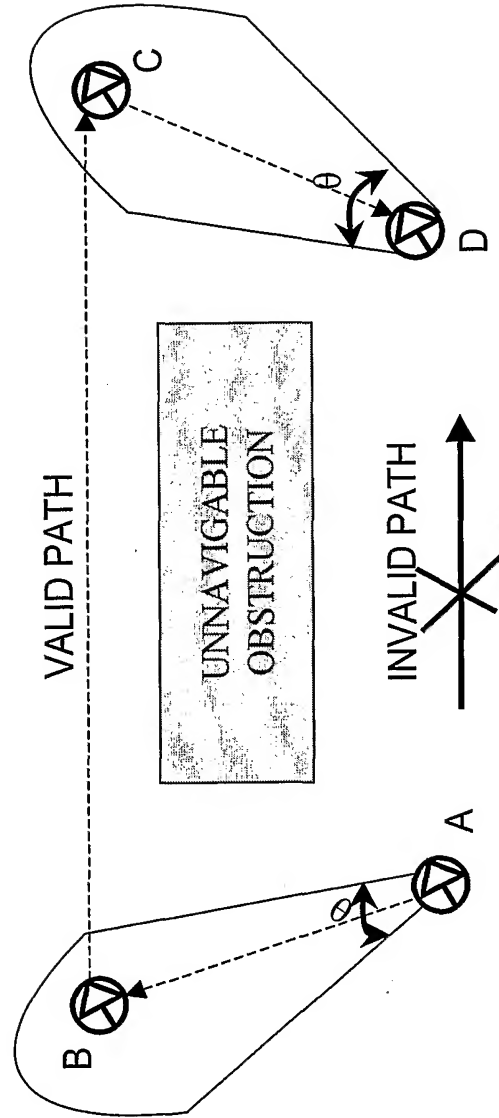

17/17

